



Chain blocks | MKO -MKT | 500 - 2000 kg


The chain hoist in the MKO and MKT series have a steel construction. The steel construction is an impact resistant cover that provides durability and protection.

The hoists have a powder coating which provides a long-lasting finish in hostile environments.

Thrust bearing, allows easy rotation of the load while suspended and prevents chain twisting.

Forged alloy steel hooks cast steel safety latches.

Type	MKO -MKT
Brand	Mitari
Finish	Powder coating
Lifting direction	Vertical
Hooks	Swivel top and bottom hooks
Chain falls	1
Chain length	Available from 3 meters
Chain	Electro-galvanized T-hardened
Control chain	5 x 25 mm Electro galvanized
Temperature range	-10 °C to +40 °C
Norm hoist	NEN-EN 12100-1/2
Norm chain	ISO 3077 EN 818-7
HS Code	8425190000

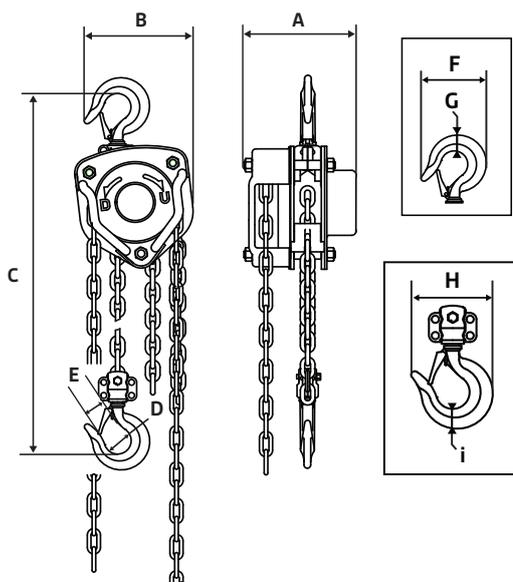

Difference between MKO and MKT

The MKO series chain blocks have overload protection. Overload protection on a hoist prevents overloading the hoist. As a result, you immediately save costs, the hoist has a longer lifespan, and you work safer.



WLL kg	Chain size mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	Weight kg
500	6 x 18	137.5	137	270	35	28	69	17	68	18	5
1.000	6 x 18	146.5	155	317	35.5	28	82	25	82	24	7
2.000	8 x 24	170	190	414	52	36	105	34	105	33	11,5