


Beam clamp | MBK | 1.000 - 10.000 kg

- For construction, commercial and industrial vertical or horizontal rigging operations.
- Mount hoists or lift beams with portable lightweight clamp.
- Adjusts with ease to fit a broad range of wide-flange H or standard I beam.
- Clamp jaw designed to distribute the load away from beam flange edge.
- Low headroom with built-in suspension rod.
- Robust all-steel construction with safety operation. Compact size with light, easy to install with minimum headroom, super-quick adjustment to any girder width in range.

Type	MBK
Brand	Mitari
Temperature range	-10 °C to + 40 °C
Norm hoist	NEN-EN 13155
HS code	8431390000

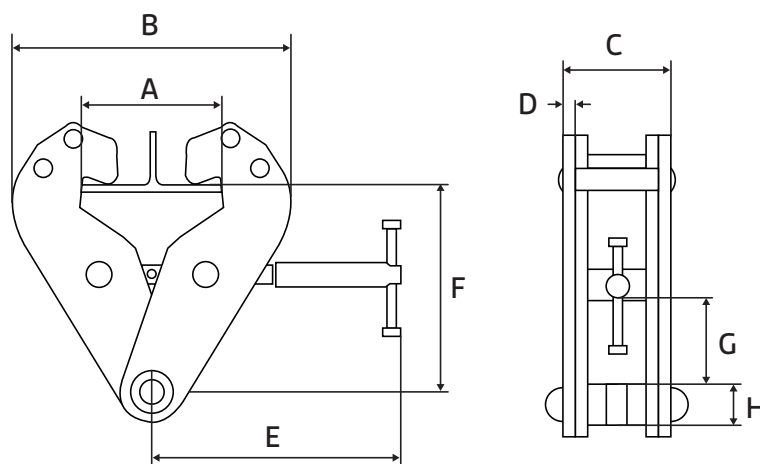

WLL kg	Beam width mm	A max	B min	B max	C mm	D mm	E mm	F min	F max	G mm	H mm	Weight kg
1.000	75 - 220	230	195	320	64	5	215	155	102	25	22	4.5
2.000	75 - 220	280	185	380	74	6	235	155	85	75	22	5
3.000	80-320	370	235	490	10	8	250	225	80	120	25	9.5
5.000	80 - 320	400	235	525	112	10	300	225	80	140	31	11
10.000	90-320	430	275	615	120	12	305	270	190	140	40	16