

BMP

It can also be controlled via the IR remote control up to 10 m away



Display with LED battery status indicator

Pole attachments allow handling of circular material and profiles

When to choose a BMP battery-powered lifting magnet:

The battery-powered BMP series magnets are easily manageable aids with a high degree of safety. They are designed to handle round and other profiles as well as flat shaped materials. The remote control will facilitate your work in locations with poor accessibility.


APPLICATION	TECHNOLOGY	NOMINAL LIFTING CAPACITY FOR FLAT MATERIAL	NOMINAL LIFTING CAPACITY FOR ROUND MATERIAL	WORKING CYCLE
 Lifting	 Electro/battery	 up to 3600 kg	 up to 2260 kg	 50 %

Other important parameters:

Temperature: max. 50°C
Safety factor: 2:1

Use:

- + handling loads with reduced surface quality
- + handling tubes, rods, I, H, T, and Z profiles and others
- + it can cope with flat materials, angles, and sheet piles

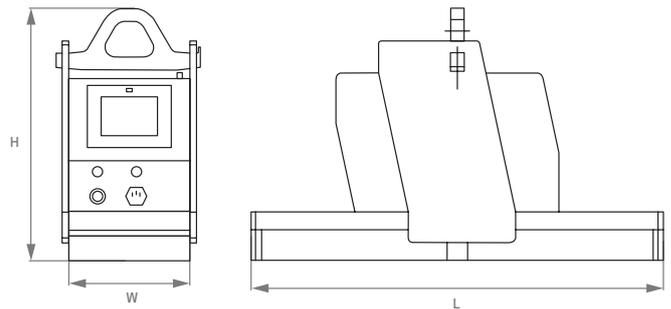

Catalog number	Workload limit flat materials (kg)	Workload limit round materials (kg)	Ø min/max (mm)	W x L of base (mm)	H (mm)	Weight (kg)	Built in battery
BMP1800	1800	1130	40/440	242 x 470	659	167	12 V/75 Ah
BMP3600	3600	2260	45/500	263 x 764	713	420	12 V/75 Ah