

TPH / TPH-HD

Heavy duty clamp with high pressure resistant plastic for horizontal pipe lifting

Application:



- For horizontal lifting and transporting of steel and concrete pipes without damaging the product
- TPH-HD version is specially designed for extreme heavy duty lifting situations (eg. loading and unloading ships)
- Terrier TPH lifting clamps must always be used in pairs
- Jaw openings available up to 70 mm
- Working load limit (WLL) 1500 - 60000 kg per pair (Higher WLL available upon request)

Features and Benefits:


- TPH Jaw is covered with a special high quality pressure resistant plastic
- TPH-HD Jaw is covered with special high quality extreme high pressure resistant plastic
- Maintenance-friendly clamps, plastic pressure resistant cover is easy to change
- TPH-HD has special handle for easy handling
- Compact design and high lifting capacity
- Lightweight design for easy handling
- Tough quality heavy duty body




TPH

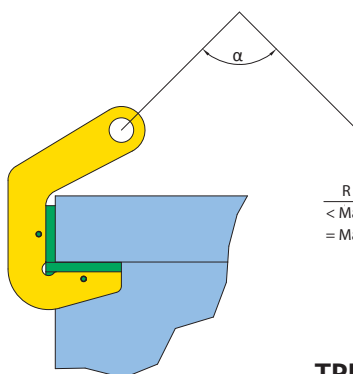

TPH	
R	α
< Max	10 - 60°
= Max	10 - 90°

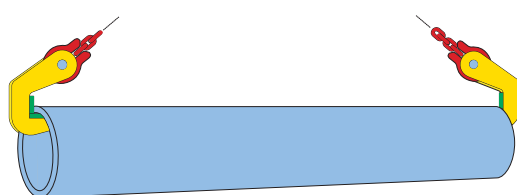

TPH-HD

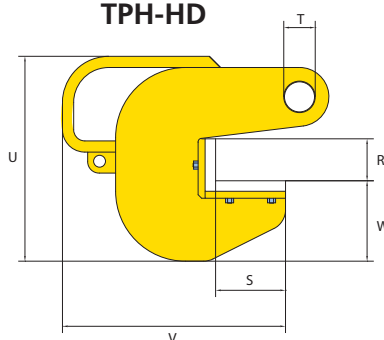

TPH-HD	
R	α
< Max	10 - 90°
= Max	10 - 120°

Article Nr.	Type	Capacity (kg/pair)	Jaw opening (R) (mm)	Dimensions in mm							Weight (kg/pc)
				V	S	W	U	T	X	Y	
960150	1.5 TPH	1500	0 - 40	120	70	50	185	16	41	25	2
960300	3 TPH	3000	0 - 40	120	70	50	185	16	41	25	2
960400	4 TPH	4000	0 - 40	140	70	58	204	26	41	25	3
960600	6 TPH	6000	0 - 50	140	70	58	204	26	41	25	3
960800	8 TPH	8000	0 - 70	140	70	58	224	26	45	25	3,4
960810	10TPH	10000	0 - 70	140	70	58	224	26	85	45	7
960812	12TPH	12000	0 - 70	140	70	58	224	26	85	45	7
960915	15TPH	15000	0 - 70	155	70	76	250	26	100	60	9
960920	20TPH	20000	0 - 70	155	70	76	250	26	100	60	9
965050	5 TPH-HD	5000	0 - 60	309	100	85	232	26	80	20	6,7
965100	10 TPH-HD	10000	0 - 60	319	100	85	236	36	80	30	9,7
965200	20 TPH-HD	20000	0 - 60	362	100	105	285	51	80	35	14
965300	30 TPH-HD	30000	0 - 60	387	100	115	310	58	80	40	19
965600	60 TPH-HD	60000	0 - 60	418	100	115	350	85	80	60	35